




Pneumatic Torque Pumps

High Performance 3-Stage Hydraulic Power Pack 800BAR

- 100mm Gauge, class 1,0; glycerine filled, 800bar
- High Flow Couplers
- Manually adjustable maximum pressure valve 0-800 bar
- Optional Full Roll Cage & Castor Wheels
- Oil Cooler for constant operation
- Available with Multi Tool Manifold for 4+ Tool Operation
- Oil sight glass



Pneumatic Power Packs - HP-110-3 FP-280-3

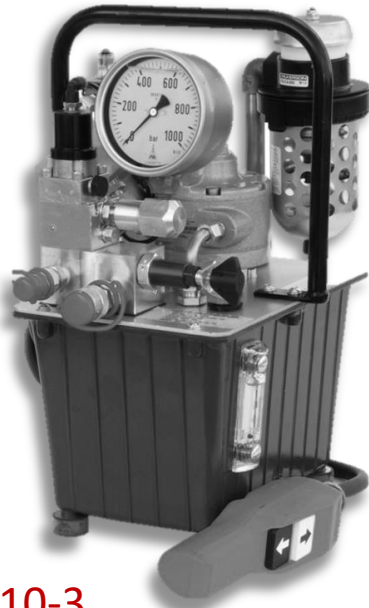

HP-110-3



FP-280-3

TECHNICAL DATA

MODEL #	HP-110-3	FP-280-3
Required Supply	60-90PSI 40+CFM	60-90PSI 40+CFM
Power	1.1kW	2.8kW
Flow Rate	6.0 - 1.0 - 0.5LPM	7.5 - 2.5 - 0.9LPM
Oil Capacity	6.0L	3.6L
Oil Cooler	Integral	Integral
Weight	28kg	30kg
Size W/D/H	320x310x420mm	280x560x380mm
Noise Level	<82dBA	<82dBA

*Supplied with CEJN Screw Fit Connectors